


TAGRAS Oilfield Services Holding



DOUBLE HOLE, SINGLE HOLE, AND DUAL COMPLETION WELLHEAD FITTINGS

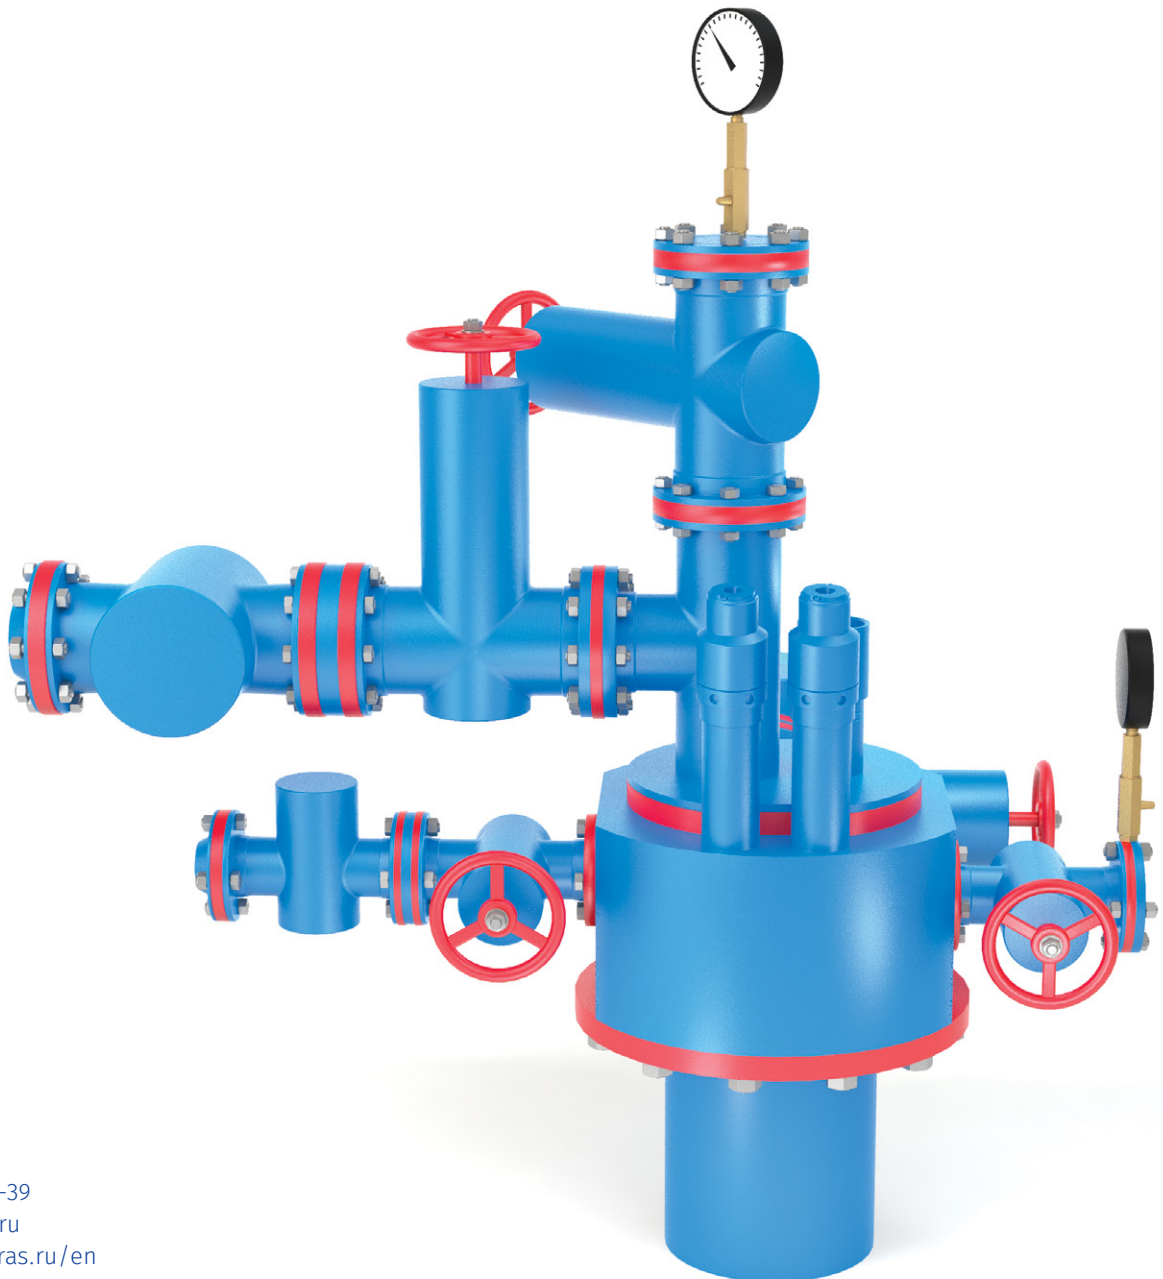

8-800-250-79-39
tmcg@tmcg.ru
www.tms.tagras.ru/en


Double bore wellhead equipment AUD 80/50-40

1



Single bore double row wellhead equipment AOD 80/50-40

2

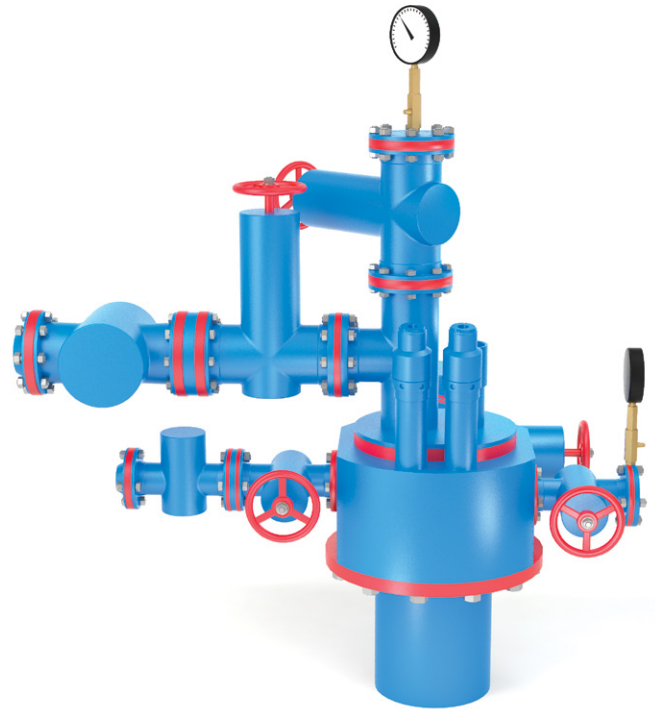

Operating pressure, psi



Connecting thread of Tubing

To casing, GOST 632-80
To internal well pipeline per GOST 633-80

1

0.58

245, 324


73, 89

2

0.58

245

89



Operating temperature



Use in the design of extra leak proof gate valves



Individual approach to Customer subject to operating conditions, options and the materials used



Reliable operation in corrosive media