


TAGRAS Oilfield Services Holding



WELLHEAD FITTINGS FOR VARIOUS APPLICATIONS

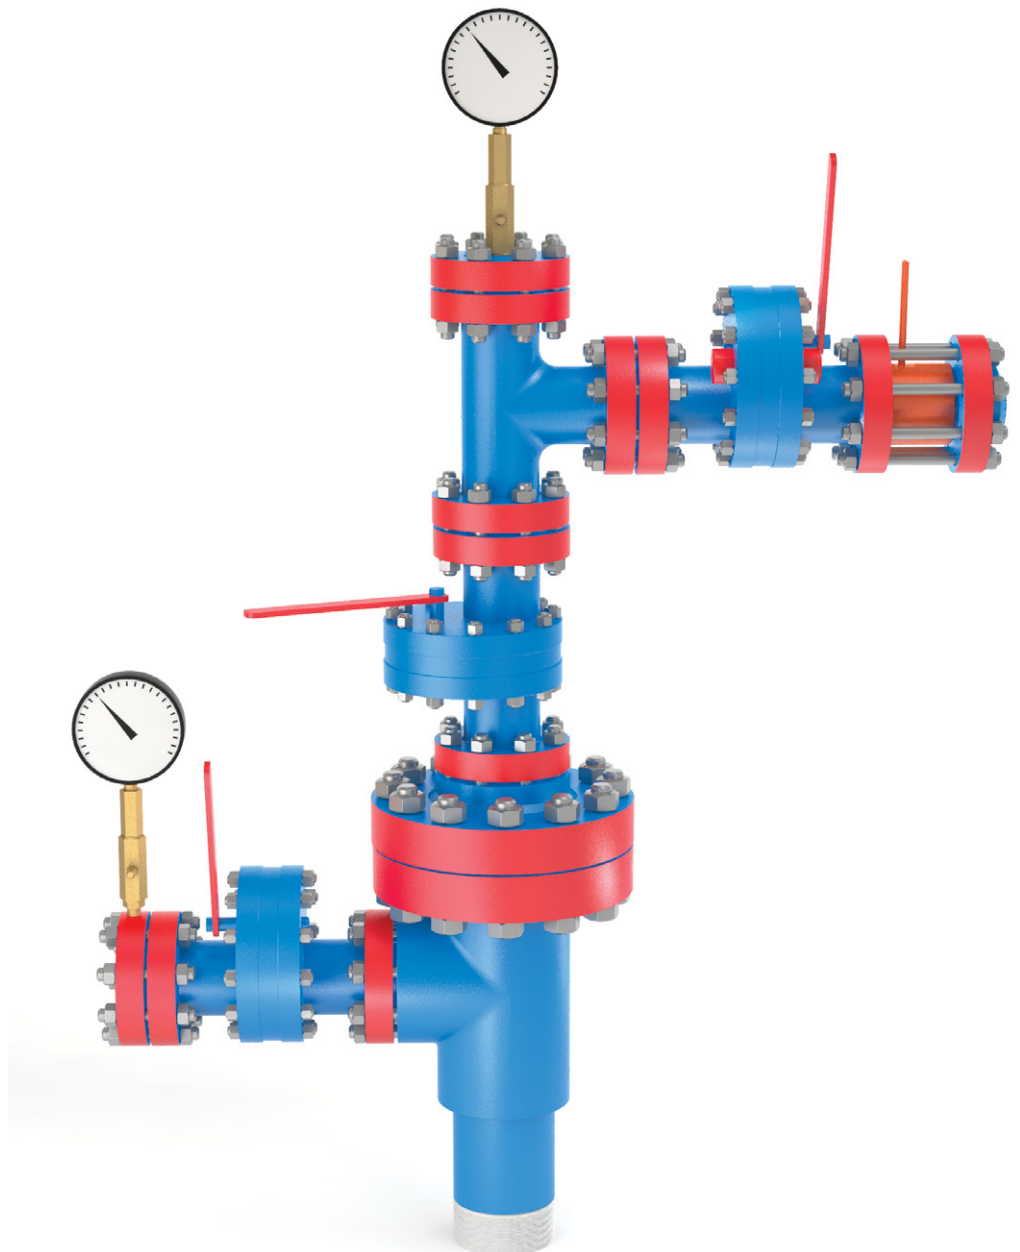


8-800-250-79-39
tmcg@tmcg.ru
www.tms.tagras.ru/en


Wellhead equipment
for installation
of sucker rod pump
AU 140x50



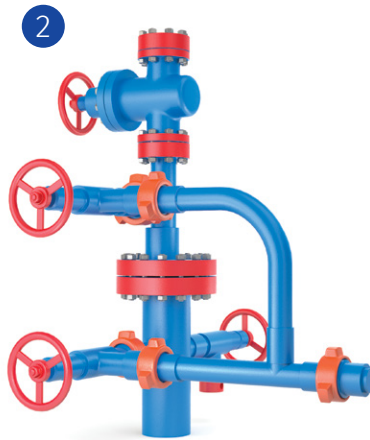



Wellhead equipment
for installation
of an electric pump
AUE 140x50

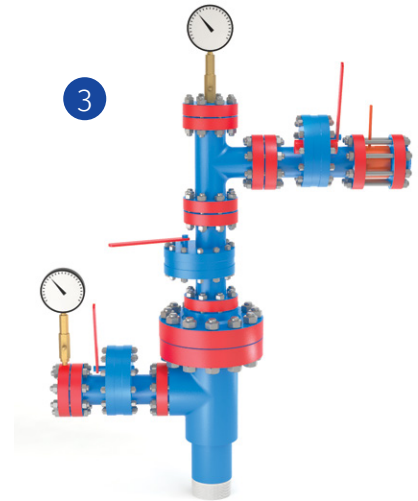

Injection wellhead
equipment
ANK 65x21



		1	2	3
 Working pressure with rocking machine running, psi		2.031	2.031	3.046
 Nominal inside diameter, in		1.97	1.97	2.56
 Connecting thread	To pipes of the Tubing String according to GOST 633-80 To casing string, OTTM GOST 632-80	Tubing String 73, 89	Tubing String 73, 89	Tubing String 60, 73, 89
		102, 114, 146, 168	102, 114, 146, 168	146, 168, 178



Operating temperature



Individual approach to Customer subject to operating conditions, options and the materials used



Use in the design of extra leak proof gate valves



Reliable operation in corrosive media